...tough and packed with features

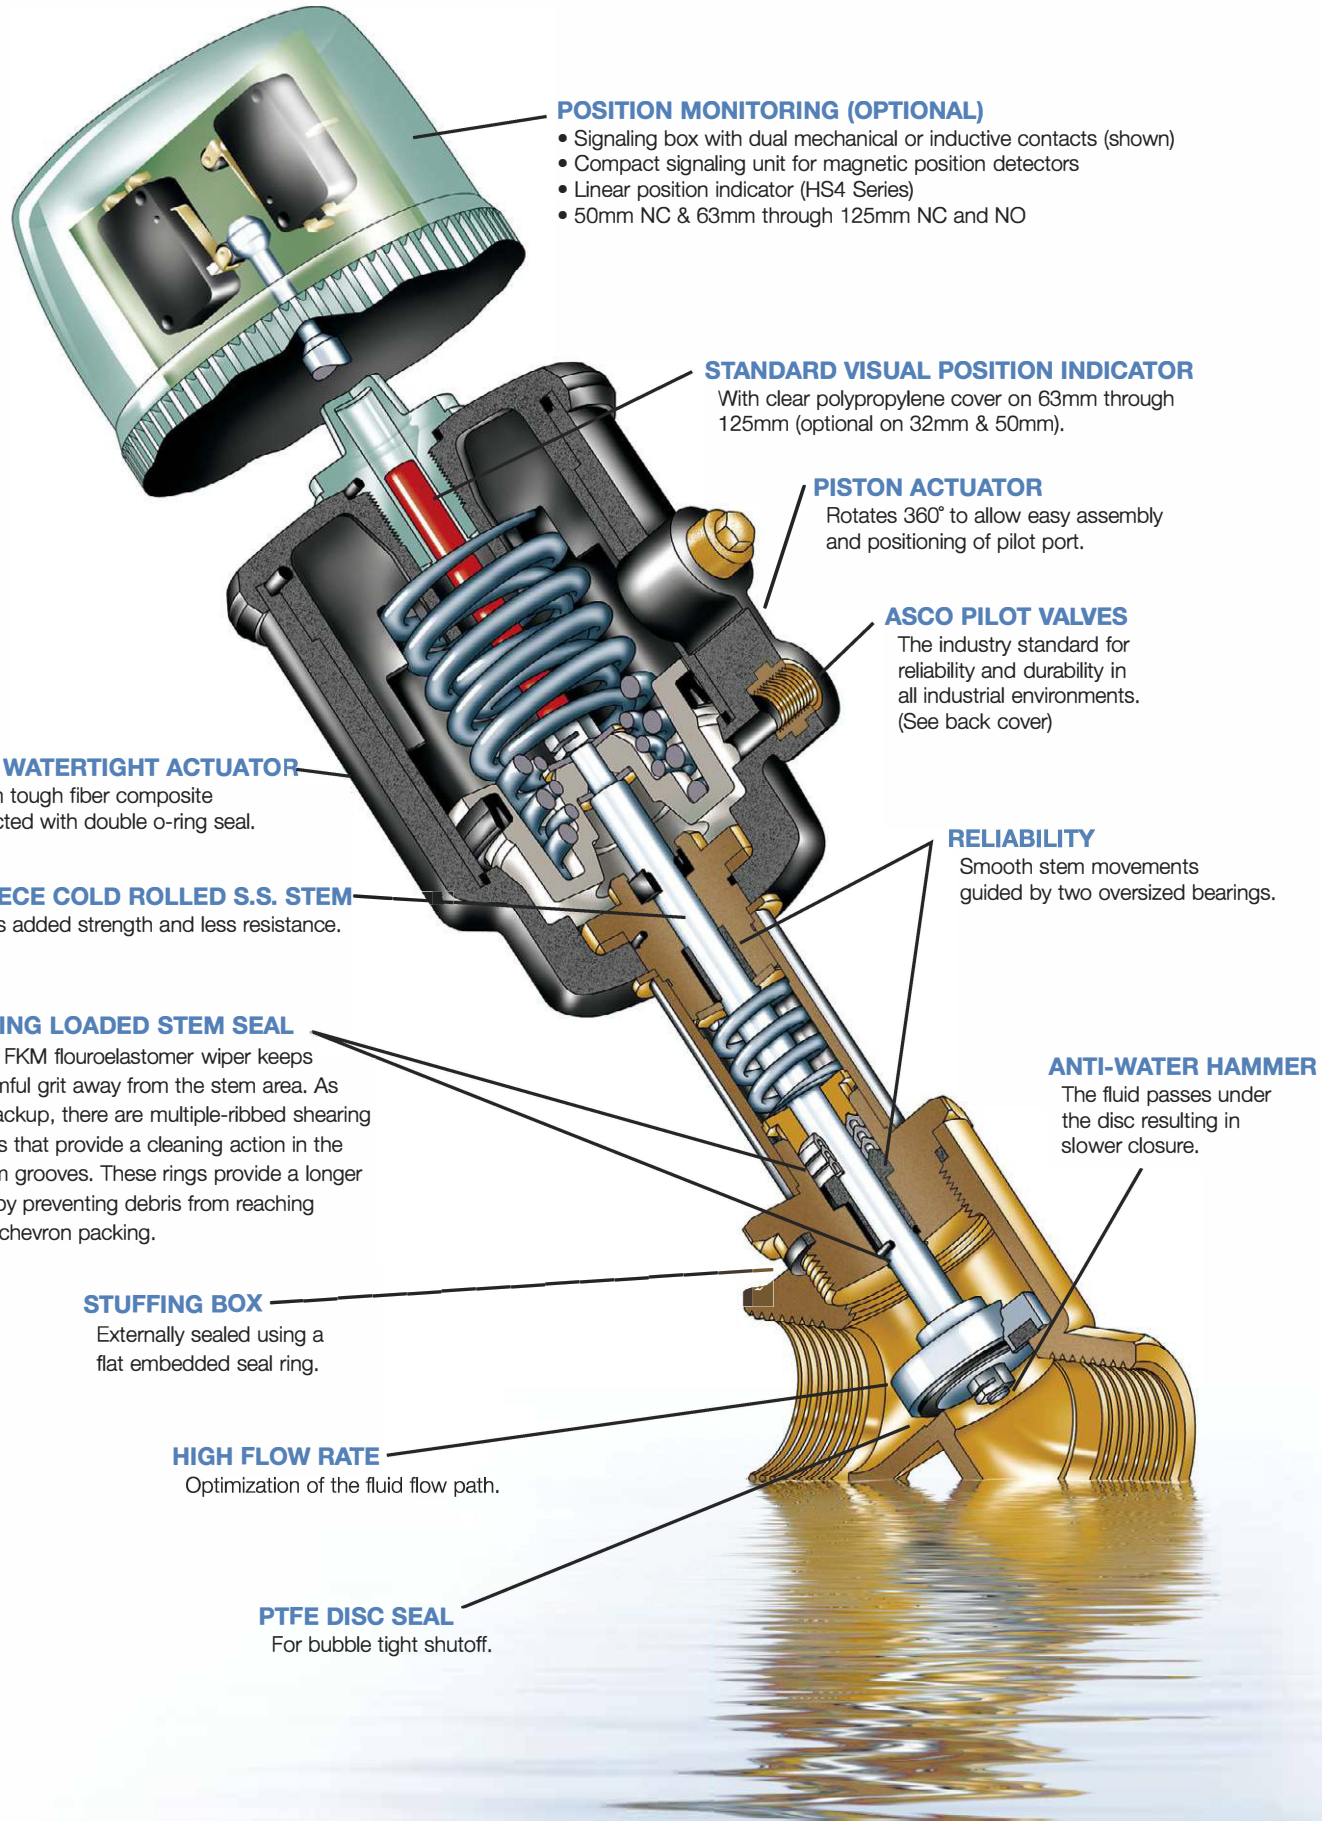

POSITION MONITORING (OPTIONAL)
- Signaling box with dual mechanical or inductive contacts (shown)
- Compact signaling unit for magnetic position detectors
- Linear position indicator (HS4 Series)
- 50mm NC & 63mm through 125mm NC and NO

STANDARD VISUAL POSITION INDICATOR
With clear polypropylene cover on 63mm through 125mm (optional on 32mm & 50mm).

PISTON ACTUATOR
Rotates 360˚ to allow easy assembly and positioning of pilot port.

ASCO PILOT VALVES
The industry standard for reliability and durability in all industrial environments. (See back cover)

RUGGED WATERTIGHT ACTUATOR
Made from tough fiber composite and protected with double o-ring seal.

RELIABILITY
Smooth stem movements guided by two oversized bearings.

ONE PIECE COLD ROLLED S.S. STEM
Provides added strength and less resistance.

SPRING LOADED STEM SEAL
The FKM flouroelastomer wiper keeps harmful grit away from the stem area. As a backup, there are multiple-ribbed shearing rings that provide a cleaning action in the stem grooves. These rings provide a longer life by preventing debris from reaching the chevron packing.

ANTI-WATER HAMMER
The fluid passes under the disc resulting in slower closure.

STUFFING BOX
Externally sealed using a flat embedded seal ring.

HIGH FLOW RATE
Optimization of the fluid flow path.

PTFE DISC SEAL
For bubble tight shutoff.